

ARIA

HEAT RECOVERY VENTILATION



NEW

SYSTEM

63
mm



ARIA
ADURO

INSULATED MASS
FLOW DUCTWORK
125 mm | 160 mm | 200 mm

MVHR AIR
DISTRIBUTION
DUCTING
SYSTEM


ARIA
CONNECT

63 mm | 75 mm | 90 mm

ARIA



Complete MVHR system
pays off more

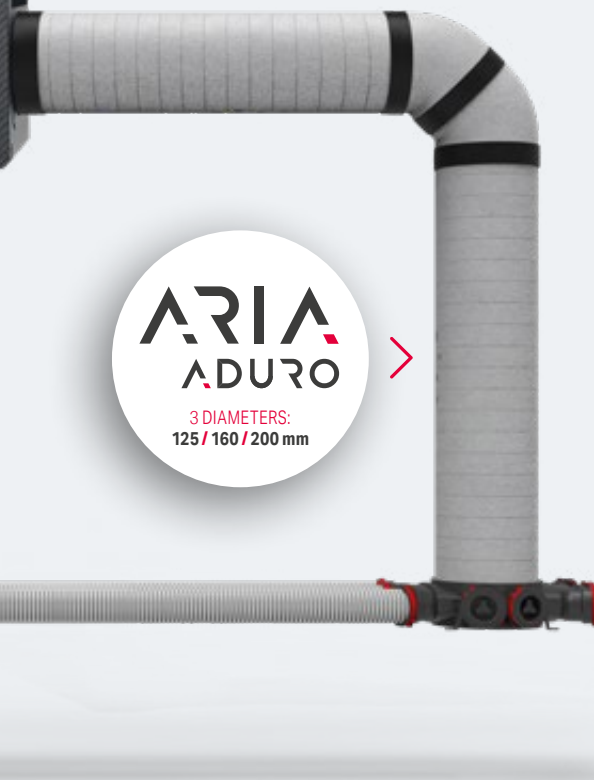

ARIA



ARIA
VITALE

Heat
recovery
ventilation
unit



ARIA
ADURO

Insulated
mass flow
ductwork



ARIA
CONNECT

Air distribution
ducting system

FIND OUT MORE ABOUT ARIA'S COMPLETE MVHR SYSTEM ON OUR WEBSITE

> logato.co.uk

ARIA CONNECT 63 / 75 / 90 mm design features 4

ARIA CONNECT system components 8

Distribution box	8
Plenum box	10
Main central connector	12
Main side connector	13
Horizontal coupling	14
Vertical coupling	15
Ventilation duct with Ultra-Fresh® antibacterial additives	16
Silencer/damper	17
Supply/exhaust diffuser	18
Mounting accessories	19
Additional ARIA CONNECT accessories (available separately)	20


Advantages of ARIA ADURO insulated mass flow ductwork for MVHR 22

ARIA ADURO system components 26



Discover all the
advantages of MVHR
air distribution
ducting system

ARIA
CONNECT

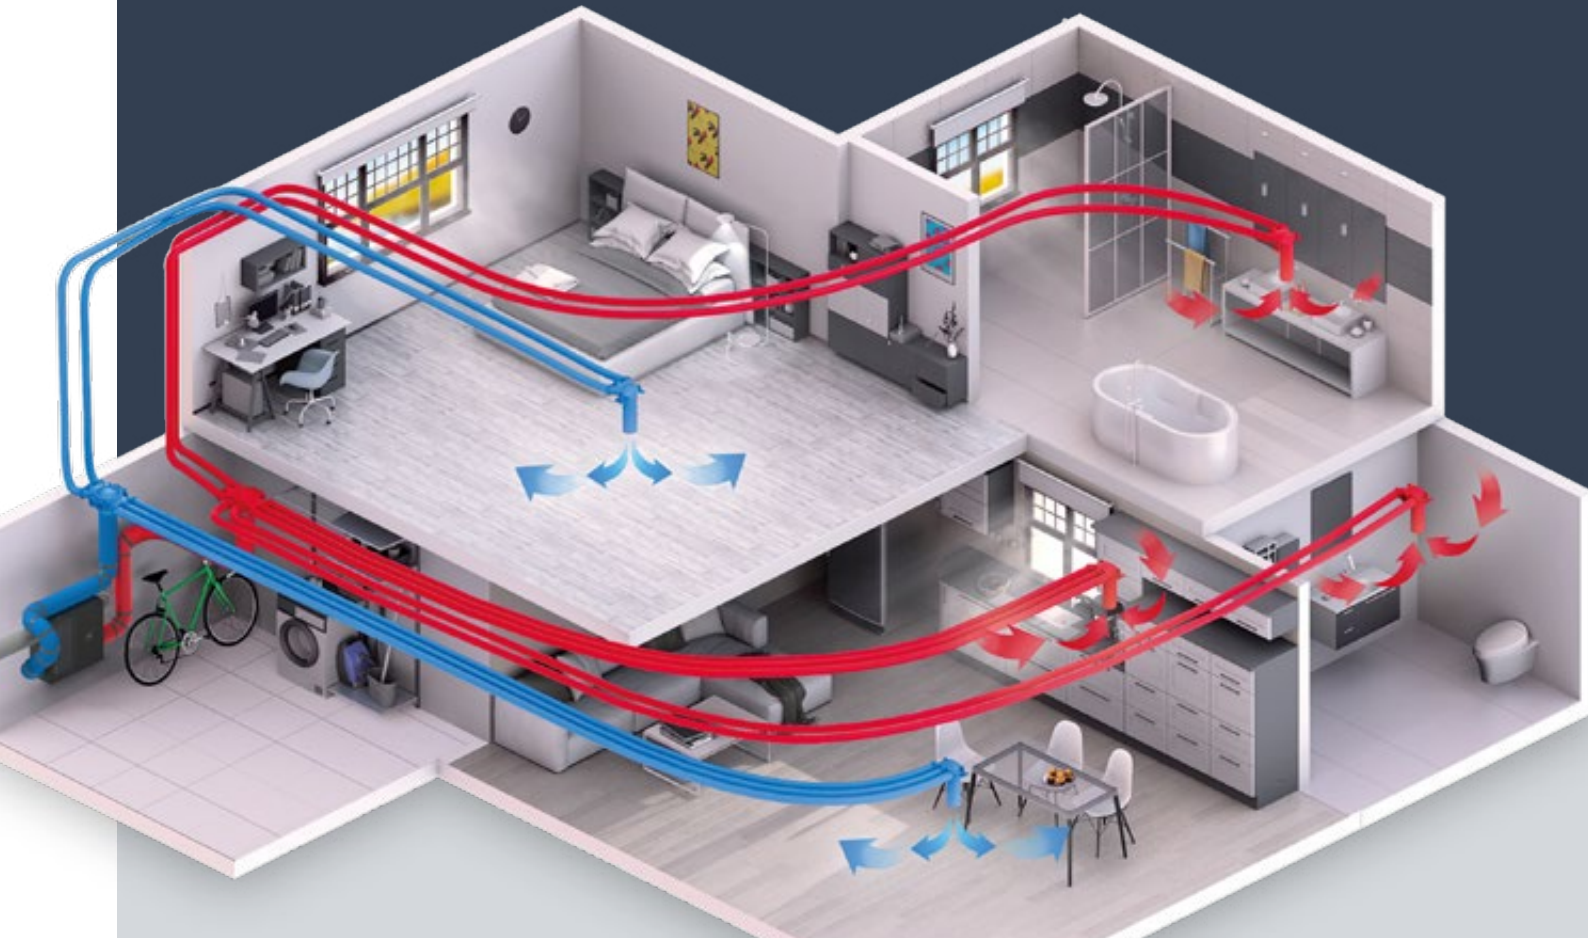

Complete air
distribution
system:

only 6
basic elements

Boxes



Connectors



Couplings



Semi-rigid
ventilation
duct



High flexibility

ARIA CONNECT with its **modular design** makes it easy to adjust to the specific requirements of any building. This helps to **reduce the number of parts** required to build the installation, **limit the space occupied by the ventilation system to a minimum** and to **keep the costs** of the entire project down.

Distribution **boxes can be joined horizontally or vertically**, increasing the number of connections needed.



Vertical connection

System 63 mm – 24 sockets
System 75 mm – 20 sockets
System 90 mm – 16 sockets



Horizontal connection

System 63 mm – 16 sockets
System 75 mm – 14 sockets
System 90 mm – 12 sockets

Installation faster than ever before

OneClick® technology

OneClick technology® – original system of connections developed by HEATPEX – **all parts of the heat recovery system can be connected without the use of any tools.** If any modifications are needed during the installation, the different parts can also be easily disconnected, with no risk of damage.



Highest airtightness level (ATC 1)

Quiet and energy-efficient MHRV system

ARIA CONNECT air distribution system has the highest airtightness class **ATC 1 (according to EN 17192 standard)** due to its ingenious OneClick Technology and a choice of **high quality construction materials**.

The ATC 1 airtightness class replaces and surpasses the previous classification standards, making it **THREE times better than the old D class**. This is achieved **without any additional sealing material** during the installation works. The ATC 1 airtightness class has been **confirmed by tests** performed by an independent laboratory.



ATC 1



**100%
ANTIBACTERIAL
PROTECTION**



Antibacterial comes as standard

Breathe fresh and clean air at all times

The entire ARIA CONNECT air distribution system is treated with the **Ultra-Fresh® antimicrobial additives to make it resistant to microbes (99.99% reduction)**. The antibacterial additives which include silver phosphate glass as its main ingredient are used by 300 global brands around the world. This has been **confirmed by independent lab tests** according to ISO 22196 standards.

The smooth inner surface of the air duct **keeps dirt deposits to a minimum**.

Durability & strength

ARIA CONNECT is built from extremely **light yet durable plastic material** ensuring reliable operation for years, **without the risk of mechanical damage or corrosion**. It can be poured with concrete with **resistance to external pressure up to 500N**.

Construction materials used (PP – polypropylene) is considered safe as it poses **no health hazard** and is **100% recyclable**.



Low-pressure loss

The careful design of every single part of the system and the **smooth inner surface of the pipes** allows for keeping the **low pressure loss**.



Low noise level

The optimal airflow through different parts of the system and **double wall pipes** helps to **reduce the level of noise** generated by the flowing air, particularly **useful at night time**.

Compact size



Only
9,5 cm

HEIGHT OF
PLENUM
BOX

Only
10,6 cm


HEIGHT OF
DISTRIBUTION
BOX

The small size of ARIA CONNECT makes it **possible to hide it in the ceiling**, either in the insulation layer covered with screed or **inside a suspended ceiling**.



Distribution box

Distribution box with OneClick technology® is connected directly to the MHRV unit and used to supply fresh air into habitable rooms or extract used air from the „dirty“ rooms.

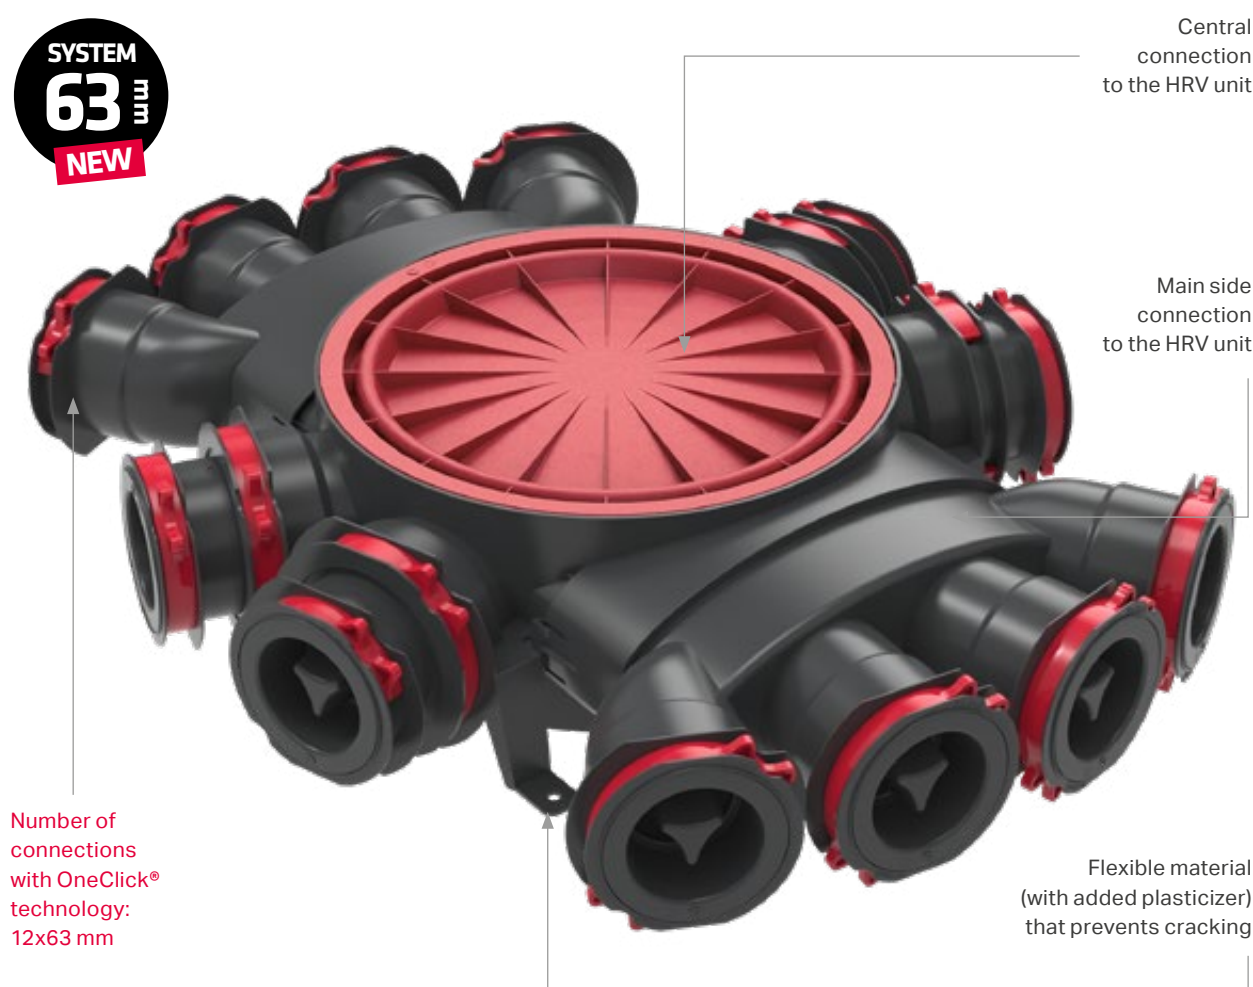

Main advantages



Sockets with gaskets and rings in the OneClick® technology (12x63mm, 10x75 mm or 8x90 mm in basic configuration) allowing for quick and convenient installation of ventilation pipes.

Modular construction enables expansion with additional distribution boxes using horizontal (16x63 mm / 14x75 mm / 12x90mm sockets) and vertical connectors (24x63 mm / 20x75 mm / 16x90 mm sockets).

High mechanical resistance thanks to the use of a specialized additive in the form of a plasticizer.

Designed to be connected to the main **central** connector or the main **side** connector.

ARIA MVHR system is the only one on the market with **the highest airtightness class – ATC 1** according to EN 17192, which guarantees **quiet operation and greater energy saving**.

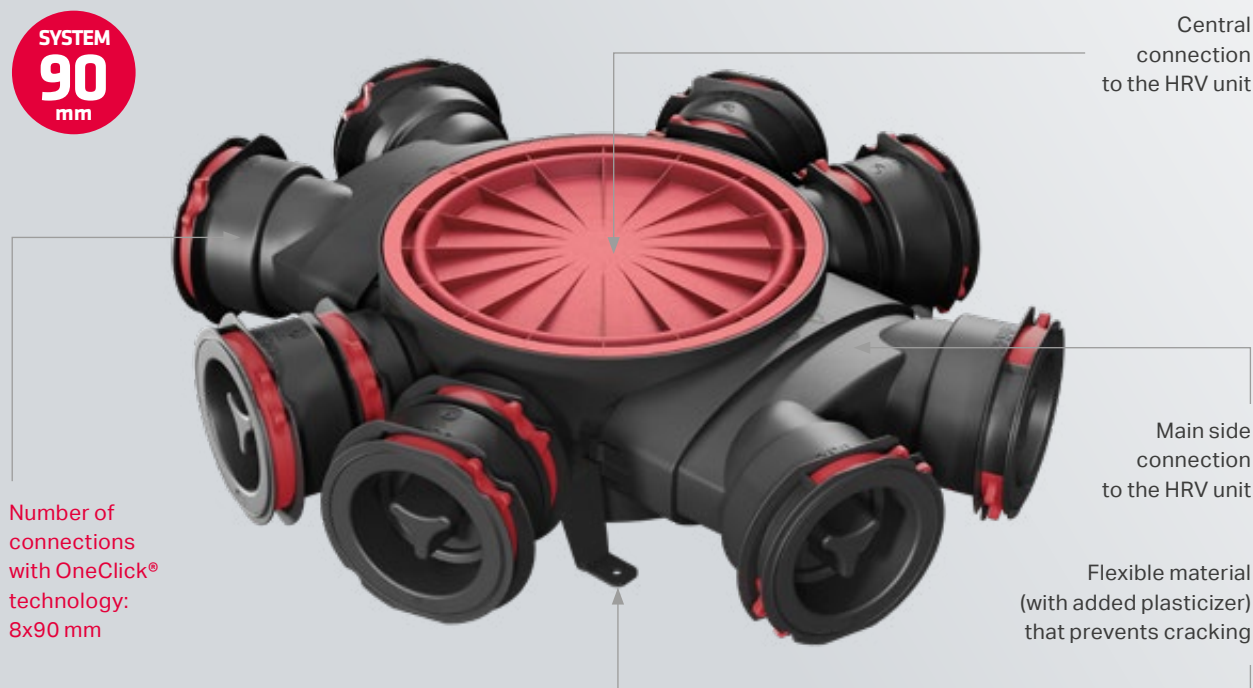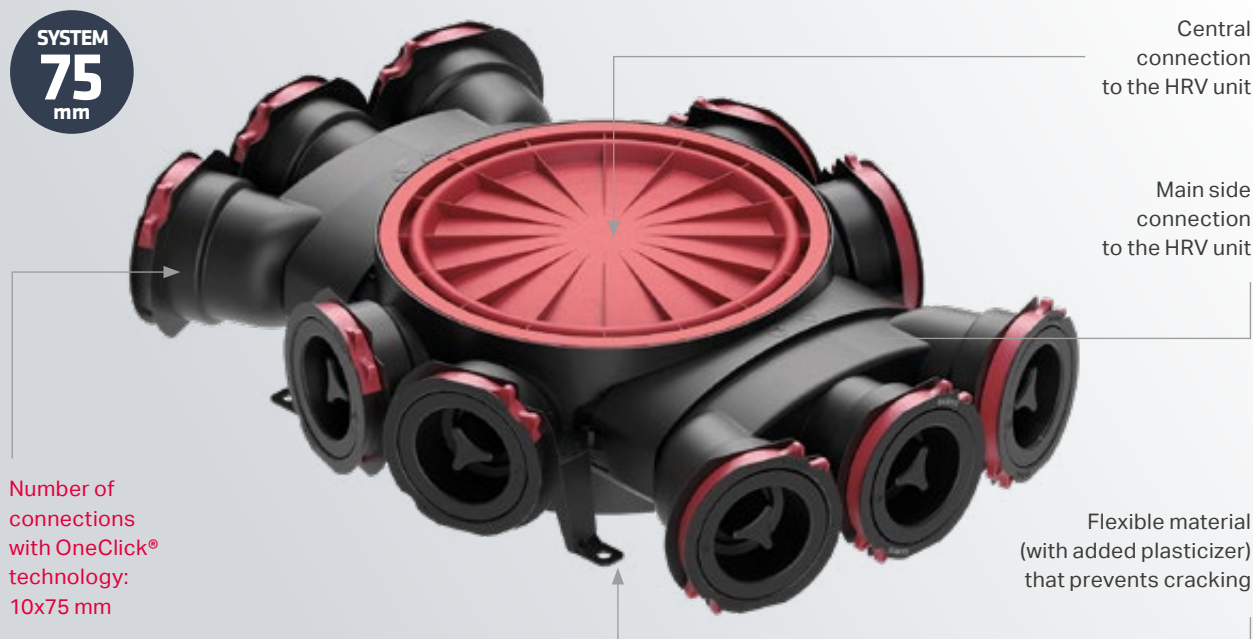

SYSTEM	Length	Width	Height	Number of sockets	Material	Airtightness class	Catalogue number
63 mm	532 mm	421 mm	106 mm	12	PP	ATC1	52306300100W
75 mm	498 mm	360 mm	106 mm	10	PP	ATC1	52300000100W
90 mm	522 mm	470 mm	106 mm	8	PP	ATC1	52309000100W

* The distribution box is delivered pre-assembled and aesthetically packaged.

Plenum box

The plenum box with OneClick® technology is the element on which we mount supply / exhaust diffusers.



Main advantages

Adaptable mounting flaps with height adjustment.

Sockets with gaskets and rings in the OneClick® technology (4x63 mm or 3x75 mm or 2x90 mm) allowing for quick and convenient installation of ventilation pipes.

High mechanical resistance thanks to the use of a specialized additive in the form of a plasticizer.

Ribs for easy cutting.

Smooth airflow adjustment thanks to a **dedicated damper.**

ARIA MVHR system is the only one on the market with **the highest airtightness class – ATC 1** according to EN 17192, which guarantees **quiet operation and greater energy saving.**

SYSTEM
75
mm

Adaptable
mounting
flaps with
height
adjustment



Connections
with OneClick®
technology:
3x75 mm

Ribs for
easy cutting

Pipe height
is 35 cm

SYSTEM
90
mm

Adaptable
mounting
flaps with
height
adjustment



Connections
with OneClick®
technology:
2x90 mm

Ribs for
easy cutting

Pipe height
is 35 cm

SYSTEM	Length	Width	Height	Diffuser connection diameter (internal)	125 mm pipe height	Material	Airtightness class	Catalogue number
63 mm	265 mm	349 mm	446 mm	125 mm	349 mm	PP	ATC1	52346300100W
75 mm	248 mm	315 mm	447 mm	125 mm	349 mm	PP	ATC1	52337500100W
90 mm	263 mm	315 mm	454 mm	125 mm	349 mm	PP	ATC1	52329000100W

* Delivered factory assembled, complete with plugs and gaskets. Aesthetically packaged.

Main central connector 125/160/200 mm

The connector is used to join the distribution box with supply or exhaust (insulated) pipes attached to the MVHR unit. It is installed in the central slot of the distribution box.



Main advantages

Fits all ventilation systems: 63 mm, 75 mm and 90 mm.

The connector is **used to attach mass flow ducts (ARIA ADURO) for the transmission of large air flows to/from the heat recovery unit.** The connector's standard diameters make it **possible to also connect metal (SPIRO) or other ducts.**

The connector **allows for standard connections of pipe of 125, 160 and 200 mm diameter.** It comes equipped with high quality gaskets for all 3 dimensions.

Additionally you connect **150 mm and 180 mm pipes**, however they **require separate additional sealing.** **To minimise pressure losses**, during installation, the smaller unused connection diameters should be cut off.

The connector has grooves that facilitate cutting off the unnecessary part.

ARIA MVHR system is the only one on the market with **the highest airtightness class – ATC 1** according to EN 17192, which guarantees **quiet operation and greater energy saving.**

Height	Maximum diameter	Material	Weight	Airtightness class	Catalogue number
171 mm	249 mm	PP	0,29 kg	ATC1	52410900100W

Main side connector 125/160 mm

The connector is used to join supply or exhaust (insulated) pipes to either side of the distribution box.

CONNECTION SCHEME



Main advantages

Fits all ventilation systems: 63 mm, 75 mm and 90 mm.

The connector is fixed to the oval slot on either side of the distribution box, replacing the 3x75 mm or 2x90 mm module.

The connector is **used to attach mass flow ducts (ARIA ADURO) for the transmission of large air flows to/from the heat recovery unit.** The connector's standard diameters make it **possible to also connect metal (SPIRO) or other ducts.**

It allows for the connection of **125mm and 160mm pipes.** The connector is provided with gaskets for 125 and 160 mm diameters. Gaskets ensure a tight and rigid connection. **The connector has a groove** to facilitate the severance of 160 mm diameter, in case the 125mm is required. This is recommended in order to minimise pressure losses.

ARIA MVHR system is the only one on the market with **the highest airtightness class – ATC 1** according to EN 17192, which guarantees **quiet operation and greater energy saving.**

Length	Width	Height	Material	Weight	Airtightness class	Catalogue number
284 mm	216 mm	167 mm	PP	0,26 kg	ATC1	52411000100W

Horizontal coupling

The horizontal coupling is used to connect two or more distribution boxes horizontally.



CONNECTION SCHEME

Main advantages

Fits all ventilation systems: 63 mm, 75 mm and 90 mm.

Connecting a second distribution box horizontally increases the **number of available sockets up to 16 (for 63 mm system) or up to 14 (for 75 mm system) or up to 12 (for 90 mm system).**

The coupling plugs into the oval socket of the distribution box replacing the 4x63 mm, 3x75 mm or 2x90 mm module.

The highest airtightness class – ATC1 according to EN 17192, ensures **quiet operation and greater energy efficiency.**

Length	Width	Height	Material	Weight	Airtightness class	Catalogue number
216 mm	110 mm	92 mm	PP	0,07 kg	ATC1	52411100100W

Vertical coupling

A coupling for connecting two or more distribution boxes vertically.

Brackets
allows for easy
installation



CONNECTION SCHEME



Main advantages

Fits all ventilation systems: 63 mm, 75 mm and 90 mm. The coupling plugs into the central slot of the distribution box.

Connecting a second distribution box vertically increases the number of available sockets up to 24 (for 63 system) or up to 20 (for 75 mm system) or up to 16 (for 90 mm system).

The coupling is equipped with **finger loops** for easy installation in the distribution box.



The highest airtightness class – ATC1 according to EN 17192, ensures **quiet operation** and **greater energy efficiency**.



Diameter	Height	Material	Weight	Airtightness class	Catalogue number
249 mm	31 mm	PP	0,06 kg	ATC1	52411200100W

Ventilation pipe with Ultra-Fresh® antibacterial additives

Semi-rigid corrugated pipe made of highest quality high-density polyethylene (PE-HD) with an outer diameter of 63 mm, 75 mm and 90 mm.

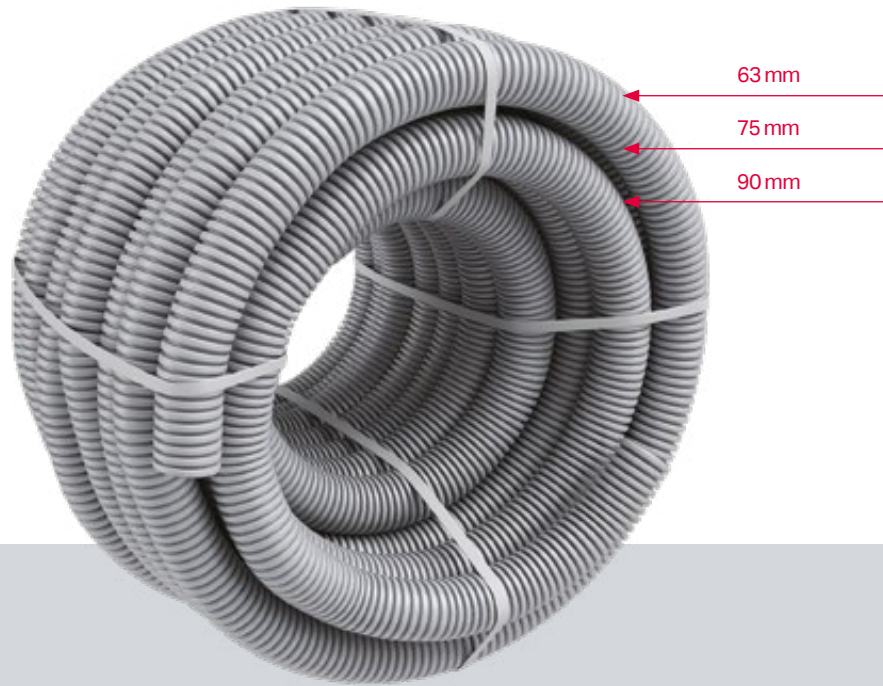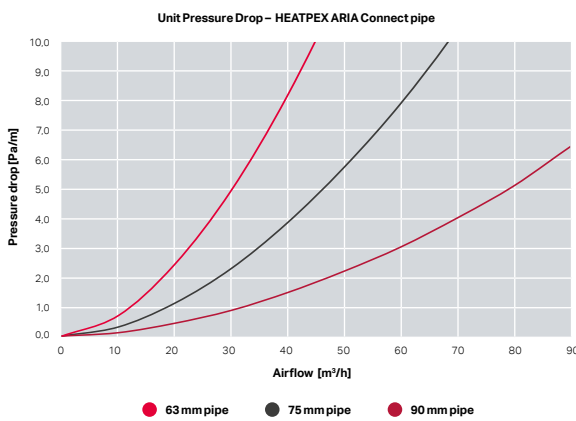

Main advantages

All HEATPEX semi-rigid corrugated pipes are made with antibacterial additives (provided by Ultra-Fresh®) **ensuring 99,99% protection against microbes, bacteria, fungi etc.**

The antibacterial efficiency was **confirmed by laboratory tests** and the additives used pose **no health hazard**.

The pipe's **semi-rigid characteristic allows for easy routing of ventilation ducts** and **effortless adaptation to installation requirements**, without the need to use any tools, fittings or additional connectors.

The **smooth inner surface of the pipe reduces flow resistance to a minimum** and makes cleaning easier.

High compressive strength of up to 500N means the pipes **can be poured with concrete without the risk of mechanical damage**.

Very good noise reduction thanks to the double-walled pipe structure.

ARIA MVHR system is the only one on the market with **the highest airtightness class – ATC 1** according to EN 17192, which guarantees **quiet operation and greater energy saving**.

SYSTEM	Dimensions			Material	Weight	Airtightness class	Catalogue number
	Outer diameter	Inner diameter	Coil length				
63 mm	64 mm	52 mm	50 m	PE-HD	0,240 kg/m	ATC1	52006305000W
75 mm	76 mm	62,5 mm	50 m	PE-HD	0,273 kg/m	ATC1	52007505000W
90 mm	91 mm	75 mm	50 m	PE-HD	0,400 kg/m	ATC1	52009005000W

Damper/silencer 125mm

Damper made of polyethylene helps adjust the ventilation system and effectively reduces noise.



Main advantages

Effective noise reduction.

Stepless adjustment of the airflow rate by turning the damper disc.

Easy installation inside the plenum box.


The highest airtightness class – ATC1 according to EN 17192, ensures **quiet operation and greater energy efficiency.**

Diameter A	Height B	Material	Weight	Airtightness class	Catalogue number
128 mm	50 mm	Polietylen	0,05 kg	ATC1	52002400100W

Supply / exhaust diffusers



Supply
diffuser

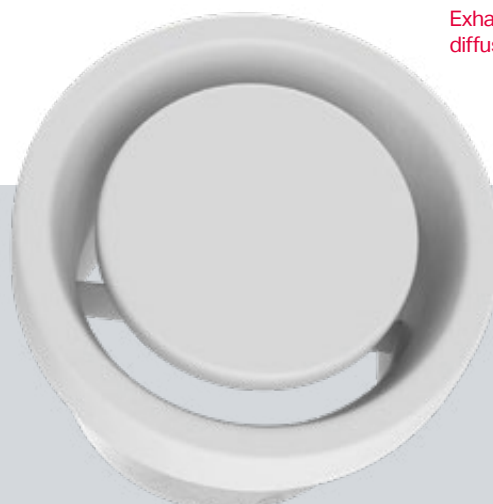

Exhaust
diffuser

Main advantages

Designed for installation **inside ARIA CONNECT plenum box.**









All diffusers come with an additional flange provided with a gasket which **maintains high level of tightness.**

The supply diffuser has **additional PE insulation.**

Smooth air flow adjustment by rotating air diffuser plate.


Diffuser type	Nominal diameter of the flange	Outer diameter	Height	Material	Weight	Catalogue number
Supply	125 mm	160 mm	60 mm	Stal	0,5 kg	52002100100W
Exhaust	125 mm	160 mm	60 mm	Stal	0,5 kg	52002200100W

Mounting accessories









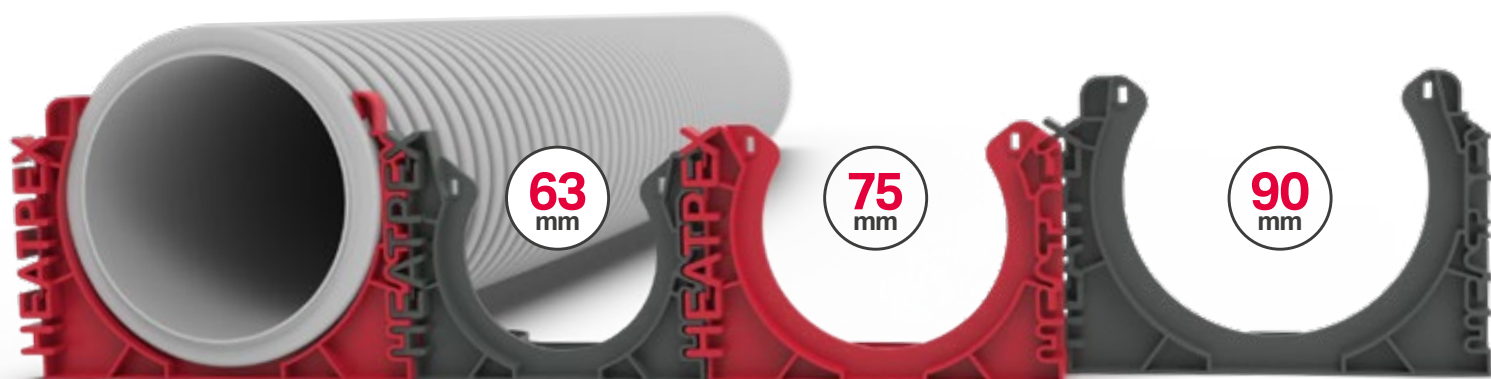





Name			Catalogue number			
	NEW Ventilation pipe cutter – 63 mm		52011800100W			
	Ventilation pipe cutter – 75 mm		52011900100W			
	Ventilation pipe cutter – 90 mm		52012000100W			
	NEW Ventilation pipe clips Red – 63 mm		48 x 83 x 66 mm	10 pieces	52012401000W	
				100 pieces	52012410000W	
	Ventilation pipe clips Grey – 63 mm			10 pieces	52012301000W	
				100 pieces	52012310000W	
	NEW Ventilation pipe clips Red – 75 mm		48 x 95 x 66 mm	10 pieces	52012501000W	
				100 pieces	52012510000W	
	Ventilation pipe clips Grey – 75 mm			10 pieces	52012101000W	
				100 pieces	52012110000W	
	NEW Ventilation pipe clips Red – 90 mm		48 x 108 x 76 mm	10 pieces	52012601000W	
				100 pieces	52012610000W	
	Ventilation pipe clips Grey – 90 mm			10 pieces	52012201000W	
				100 pieces	52012210000W	











The two colours, each serving an auxiliary function in distinguishing between supply and exhaust ducts. The colours do not affect the performance.

Simple and quick clip connection



ARIA CONNECT additional accessories (available separately)

	Name	Catalogue number	
	63 mm distribution box body	52414100100W	
	75 mm distribution box body	52410100100W	
	90 mm distribution box body	52413100100W	
	63 / 75 / 90 mm plenum box body	52410500100W	
	4 x 63 mm module for plenum box / distribution box	52414000100W	
	3 x 75 mm module for plenum box / distribution box	52410300100W	
	2 x 90 mm module for plenum box / distribution box	52413000100W	

	Name	Catalogue number	
	End plug 63 mm	52414200100W	
	End plug 75 mm	52001000100W	
	End plug 90 mm	52413200100W	
	Distribution box cover – universal	52410400100W	
	Double-socket pipe connector for 63 mm system with a set of 2 gaskets	52011600100W	
	Double-socket pipe connector for 75 mm system with a set of 2 gaskets	52011200100W	
	Double-socket pipe connector for 90 mm system with a set of 2 gaskets	52011500100W	
	Gasket 63 mm	52011700100M	
	Gasket 75 mm	52002000100M	
	Gasket 90 mm	52011400100M	
	Distribution box end plug – universal	52001100100W	

Discover all advantages
of ARIA ADURO insulated
mass flow ductwork
for MVHR

ARIA ADURO

High insulating properties

ARIA ADURO is made of a **lightweight and durable material with insulating properties** – foamed polystyrene with added graphite is biologically resistant to fungi, mould and bacteria. Both – the plastic and graphite added during production – **result in a significant increase in insulation ($\lambda=0.029$ W/mK) compared to metal ducts insulated with wool**. Such high insulation minimizes heat loss and prevents condensation inside and outside the duct.

$$\lambda=0.029 \text{ (W/mK)}$$

Highest airtightness

The materials used, the patented **OneClick® connection system** and the design of the individual elements, allow the **highest airtightness class – ATC1 according to PN-EN-17192**, confirmed by tests performed by an independent laboratory. This means **3 times higher airtightness than systems with class D**. The high airtightness is also due to the design of the ARIA ADURO pipe – **a monorail made entirely of 1 element and a connector with a gasket**, which – thanks to its low profile – does not increase the diameter of the installation.



ATC1 HIGHEST
AIRTIGHTNESS
CLASS

In the case of installing the ARIA ADURO system in cold zones such as unheated attics, it is recommended to additionally insulate the entire system throughout the cold zone (temperature below 0°C) to prevent condensation, which could result in water dripping on the pipe walls. The thickness of the additional insulation depends on the climatic zone in which the system is installed – the recommended minimum is 5 cm.



Universal system

3 diameters: 125 mm / 160 mm / 200 mm



Reducer
adjustable
to all diameters



125
mm

160
mm

200
mm

Original mounting brackets for quick installation

Quick installation – simply attach the bracket to the surface, slide the pipe through and tighten the band.

Modularity – brackets, connected in series or in parallel, can be used for routing two or more ducts next to each other.

Ultra-light elements **require a minimum number** of mounting brackets.

Versatility – one size bracket for all 3 diameters.



5 cm

Effortless cutting – simple setup

Markers (every 5 cm) help cut the pipe to required length. Wall thickness of only 17 mm lets you easily cut the pipe, using a simple knife.



2x

faster installation

The ARIA ADURO system is **9 times lighter than a traditional ventilation duct based on metal pipes**, making it easier to installation to walls or suspension under the ceiling. Thus, the **installation is 2 times faster**.

2x

lower airflow resistance


The durable, rigid material with a smooth walls guarantees **no risk of deformation during installation and reduces flow resistance twice as much as flexible hoses**, ensuring quiet and cheaper operation.



Proven solution: OneClick® technology

Thanks to the application of OneClick technology known from HEATPEX ARIA air distribution system, **connecting ARIA ADURO elements together is faster and easier than ever before.**

ARIA ADURO system elements




Connector

Connector (gasket included) – a simple push-fit connection. **Connector low profile does not alter the overall installation diameter.**

Special openings **indicate secure connection.**



Mounting bracket with adjustable band clamp

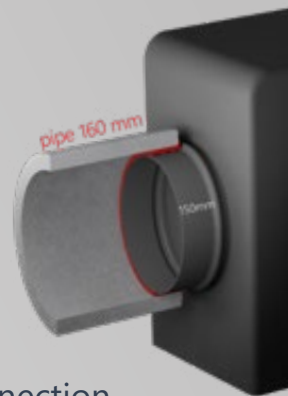

Connection adapter

Intended for MHRV recovery units with 150 and 180 mm spigots.

150 > 160

180 > 200

Pipes

1-metre section, made entirely from **1 piece (monopipe)** – higher tightness and lower damage risk.

Reducer

Adjustable to all 3 diameters:
125/160/200 mm.

..... Bend 45°

..... Tee

Complete MVHR system with standard dimensions


ARIA ADURO is 100% compatible with HEATPEX ARIA air distribution semi-rigid ducting system. ARIA ADURO fits to most heat recovery units available on the market, its dimensions coherent with traditional ventilation systems. Internal dimensions comply with EN 1506:2007 standards.



Technical data: System elements

Name		Designation	Diameter		Length	Material	Airtightness class	Catalogue number
			inner	outer				
			mm	mm	mm			
Pipe 1 m		ADR 125	125	159	1000	EPS	ATC1	52912500100T
		ADR160	160	194				52916000100T
		ADR 200	200	234				52920000100T
Bend 45°		ADK 125	125	159	213	EPS	ATC1	52912590100T
		ADK160	160	194	226			52916090100T
		ADK 200	200	234	240			52920090100T
Tee		ADT 125	125	159	380	EPS	ATC1	52912580100W
		ADT160	160	194				52916080100T
		ADT 200	200	234				52920080100T
Damper		ADP 125	125	159	250	EPS, galvanized steel	ATC1	52912560100W
		ADP160	160	194				52916060100W
		ADP 200	200	234				52920060100W
Connector		ADL 125	125		70	PP, EPDM	ATC1	52912570100W
		ADL160	160					52916070100W
		ADL 200	200					52920070100W
Reducer		ADD 125/160/200	125/160/200		167	EPS	ATC1	52010200100T
Mounting bracket		ADU 125/160/200	125/160/200		300	PP, nylon	ATC1	52010100100W
NEW								
HRV unit connection adapter		AKR 150/160	150/160		40	EPDM	ATC1	52011600100T
		AKR 180/200	180/200		40	EPDM	ATC1	52011700100T

Technical data: Accessories

Name	Designation	Diameter	Length	Material	Catalogue number
		mm	mm		
Duct silencer 	BL 125	125	1000	Aluminum-polyester jacket, galvanized steel, EPDM gaskets, glass wool insulation	52010300100T
	BL 160	160			52010400100T
	BL 200	200			52010500100T
Air intake / outlet grille - hooded 	AN 125	125	-	Stainless steel	52010600100T
	AN160	160			52010700100T
	AN 200	200			52010800100T
Air intake / outlet grille - flat 	KA 125	125	-	Stainless steel	52010900100T
	KA160	160			52011000100T
	KA 200	200			52011100100T



100% ANTIBACTERIAL
PROTECTION



ATC1 TOP AIRTIGHTNESS
CLASS



100% RECYCLABLE

Logato Ltd
Micklethwaite House
70 Cross Green Lane
LEEDS, West Yorkshire. LS9 0DG

See how to work with the
OneClick® technology

This brochure, together with the information contained herein, is for informational purposes only and does not constitute an offer as defined in the provisions of the Civil Code. We reserve the right to introduce content changes and without prior notice.

> **logato.co.uk**